

Colenta[®] INDX 43

COLENTA Industrial Film Processor INDX 43/3MW and INDX 43/5MW

For processing all regular used type of Rolls/Cut sheets of industrial x-ray films.

	DEV-Time	Cycle Time	Intake Speed	
INDX 43/3 MW :	32sec to	2'26"min to	77cm/min to	(min.)
(max 43cm)	176 sec	14'18"min	14cm/min	(max.)
INDX 43/5 MW :	30sec to	2'08"min to	115cm/min to	(min.)
(max 43cm)	165 sec	11'45"min	21cm/min	(max.)

INDX-model processors have 9 programmable processing channels, an intermediate rinse bath rack system, feed in table, hose/tube connection (100 mm dia.) facility for ventilation of the processors wet-section to an external exhaust fan and supplied with 2 x 30 lt replenishment storage tanks



Standard Features and accessories:

- Low Level monitoring of all Tank solutions.
- Automatic Solution Tank „Top-Up“ control on „Start-Up“
- „Work in Progress“ monitoring
- Rep storage tanks
- prepared to connect the processor to an external exhaust air system

Optional available:

Auto-NDT-Film Feeder for Colenta INDX NDT Film Processors. (Inter-changeable with the Film Feed Tray supplied with the INDX units)




Microprocessor controlled Display




Optional accessories:

Rack Carrier Tray/Drip Tray for easy handling the transport racks


TRANSPORTSYSTEM:

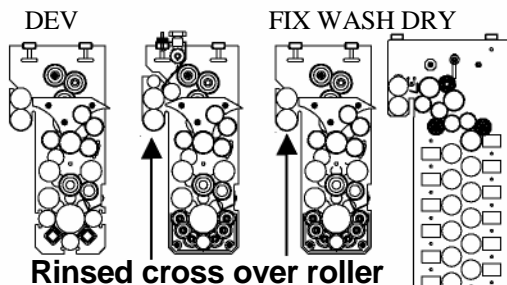

Rinsed cross over roller

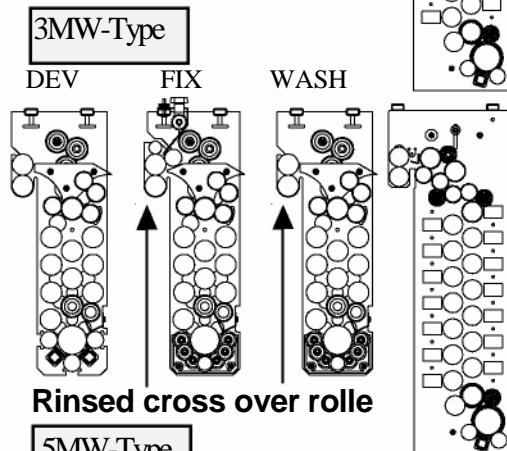

Rinsed cross over rolle

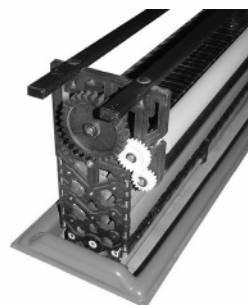

Cover Lid for Film Feed Tray



Integrated Filter for the Developer.
(Standard)



Distributed by

Hexagon International (GB)Ltd
www.HexagonLimited.com

Colenta[®]
Technical specification subject
to change without notice.