


## **Technical Data**

Height:	185mm
Width:	184mm
Depth:	216mm
Weight	$1.9 \mathrm{kg}$
External Air Supply:	Clean, dry air: Inlet air supply 6mm push-in fitting.
Min. Air Supply Pressure:	5 bar / 72psi
Max Air Supply Pressure:	7 bar / 100psi
Output Pressure:	0-7 bar / 100psi: Infinitely variable for cutting/polishing via control knob and pressure gauge.
Air Abrasion Media:	53μm (micron) Aluminium Oxide; 29μm Aluminium Oxide.
Air Polishing Media:	'Sylc for Aquacut'; Superfine Sodium Bicarbonate.
AquaAbrasion Handpiece:	Anodised aluminium with protective plastic sleeve; Quick release mechanism for easy nozzle changes; Stainless steel nozzles with tungsten carbide tips (autoclavable).
Handpiece Tip Sizes:	0.4/0.6/0.8mm; Colour-coded for easy tip identification.
3-Stage Foot	Triple action foot control for cut, wash and dry; 2m / 6' four-core pneumatic supply tube.

**Control:** 

## AquaCare Accessories Pack

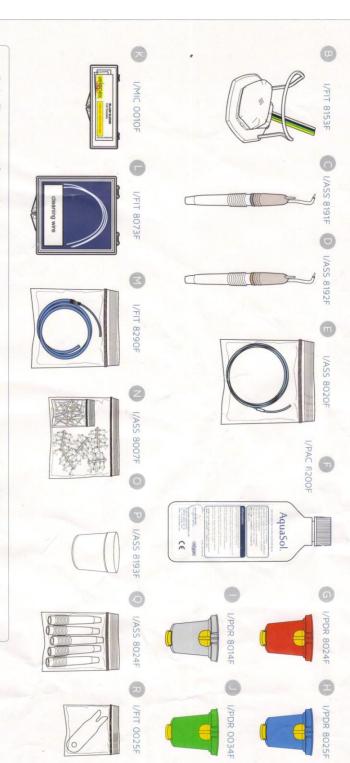

- B. 1 x Three-position foot pedal.
  C. 1 x Silver 0.6mm handpiece.
  D. 1 x Gold 0.8mm handpiece.
  E. 1 x Quick release twin feed tube assembly.
  F. 1 x 500ml AquaCare Cleaning fluid (AquaSol).

- G. 1 x Cartridge of gamma irradiated aluminium oxide, 53 micron (Red).
  H. 1 x Cartridge of gamma irradiated aluminium oxide, 29 micron (Blue).
  I. 1 x Cartridge of gamma irradiated fine granular sodium bicarbonate (Clear).
  J. 1 x Cartridge of gamma irradiated Sylc for AquaCare (Green).

- K. 1 x Pack of 5 glass slides.
  L. 1 x Nozzle cleaning wire.
  M.1 x 2 metre length 4mm air input hose.
  N. 1 x Pack of 50 disposable feedlines.
  O. 1 x Pack of 50 disposable tips.
  P. 1 x Powder storage pot.
  Q. 1 x Pack of 5 spare handpiece parts.
  R. 1 x Handpiece Tube removal tool.



